

VI-K13P 4-Wire Analog Video Intercom Kit



- One call button for easier calls
- Plug and play
- One-press to unlock the door
- IP65 protection level
- Supports max.2 door stations and 3 indoor stations in one system


▪ Specification

Door station	
Resolution	1920 × 1080 Stream resolution: 960 × 576
Lens	1/2.7" CMOS
FOV	Horizontal: 66.2°, Vertical: 37.2°
Door station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Door station	
I/O output	1 relay output
Four-wire	1-ch video input, 1-ch audio input/output, 1-ch power supply, 1-ch grounding
Door station	
Power supply	12 VDC
Power consumption	Max. 5W
Working temperature	-10° C to + 55° C (14° F to 131° F)
Working humidity	10% to 90%
Dimensions	128 mm × 42 mm × 24.8 mm
Protective level	IP65
Indoor station	
Operation method	Physical button
Type	7-inch colorful TFT LCD
Resolution	800 × 480
Indoor station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Indoor station	
Power supply	12 VDC
Power consumption	≤5 W
Working temperature	-10° C to + 55° C (14° F to 131° F)
Working humidity	10% to 90%
Dimensions (W × H × D)	195.8 mm × 132.8 mm × 18.39 mm (7.7" × 5.2" × 0.7")

▪ Available Model


VI-K13P

▪ Dimension

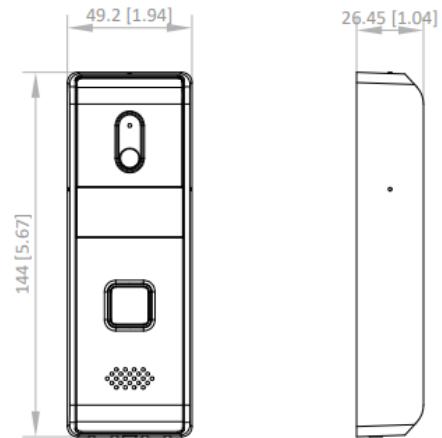

Unit: mm [inch]

SCALE	1:1
-------	-----

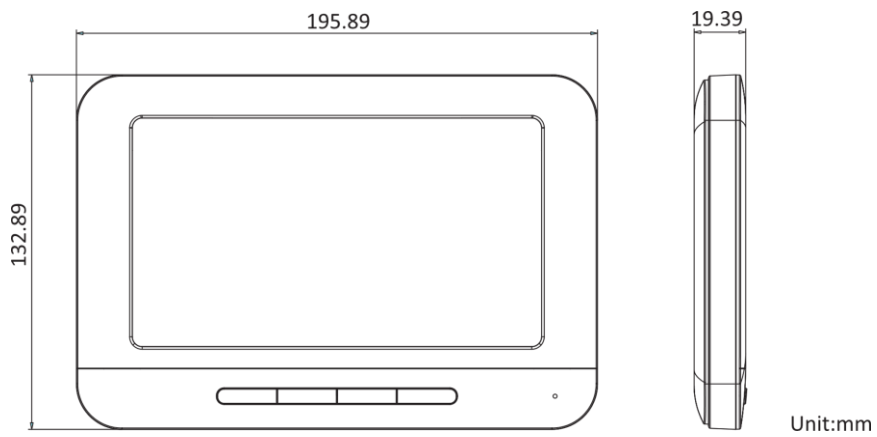

HiLook

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.

